

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

60153573.

Model :

NOVA UP 600 M-AE

Pump data

Free passage : 10 mm

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature : 40 °C

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body Technopolymer

Impeller Technopolymer



OR ring NBR

Motor top body Stainless Steel AISI 304

Rotor shaft AISI 416 X12 CrS 13 UNI EN 10088-1

V-RING NBR

Suction strainer Technopolymer

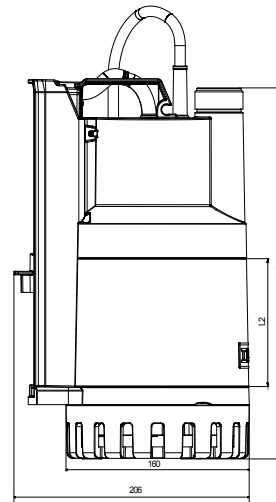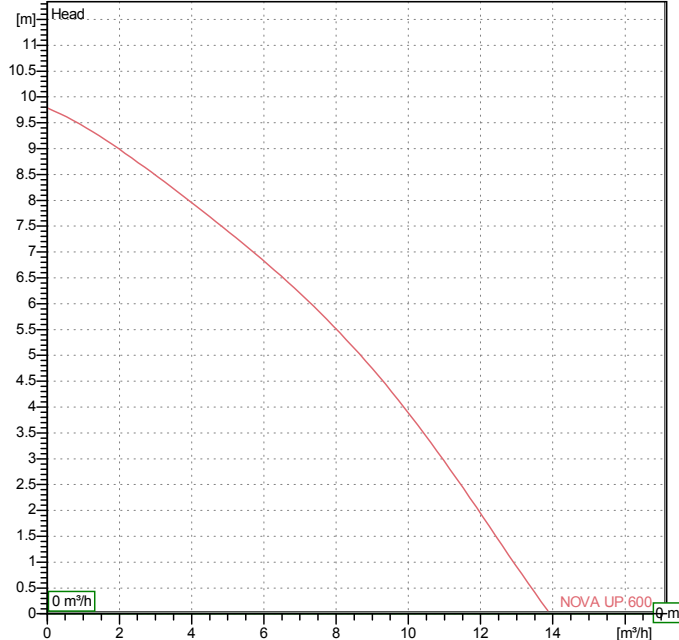Curve tolerance according to ISO 9906

Motor data
Weight : 7.3 kg

Motor brand : DAB

Nominal power P2 : 0.52 kW

Rated speed : 2850 rpm

Rated voltage : 1~ 220-240 V 50 Hz

Nominal current : 3.5 A

Degree of protection : IP 68

Dimensions in mm

Dimension	Value	Unit	Notes
L1	324	mm	
L2	111.6	mm	

Pump connection

 Suction side : /
 Discharge side : 1" 1/4 G / --



PERFORMANCE CURVES


24/03/2016

Page 2 / 3

Society Reference Address Phone Fax E-mail	Receiver	From

NOVA UP 600 M-AE

Curve tolerance according to ISO 9906

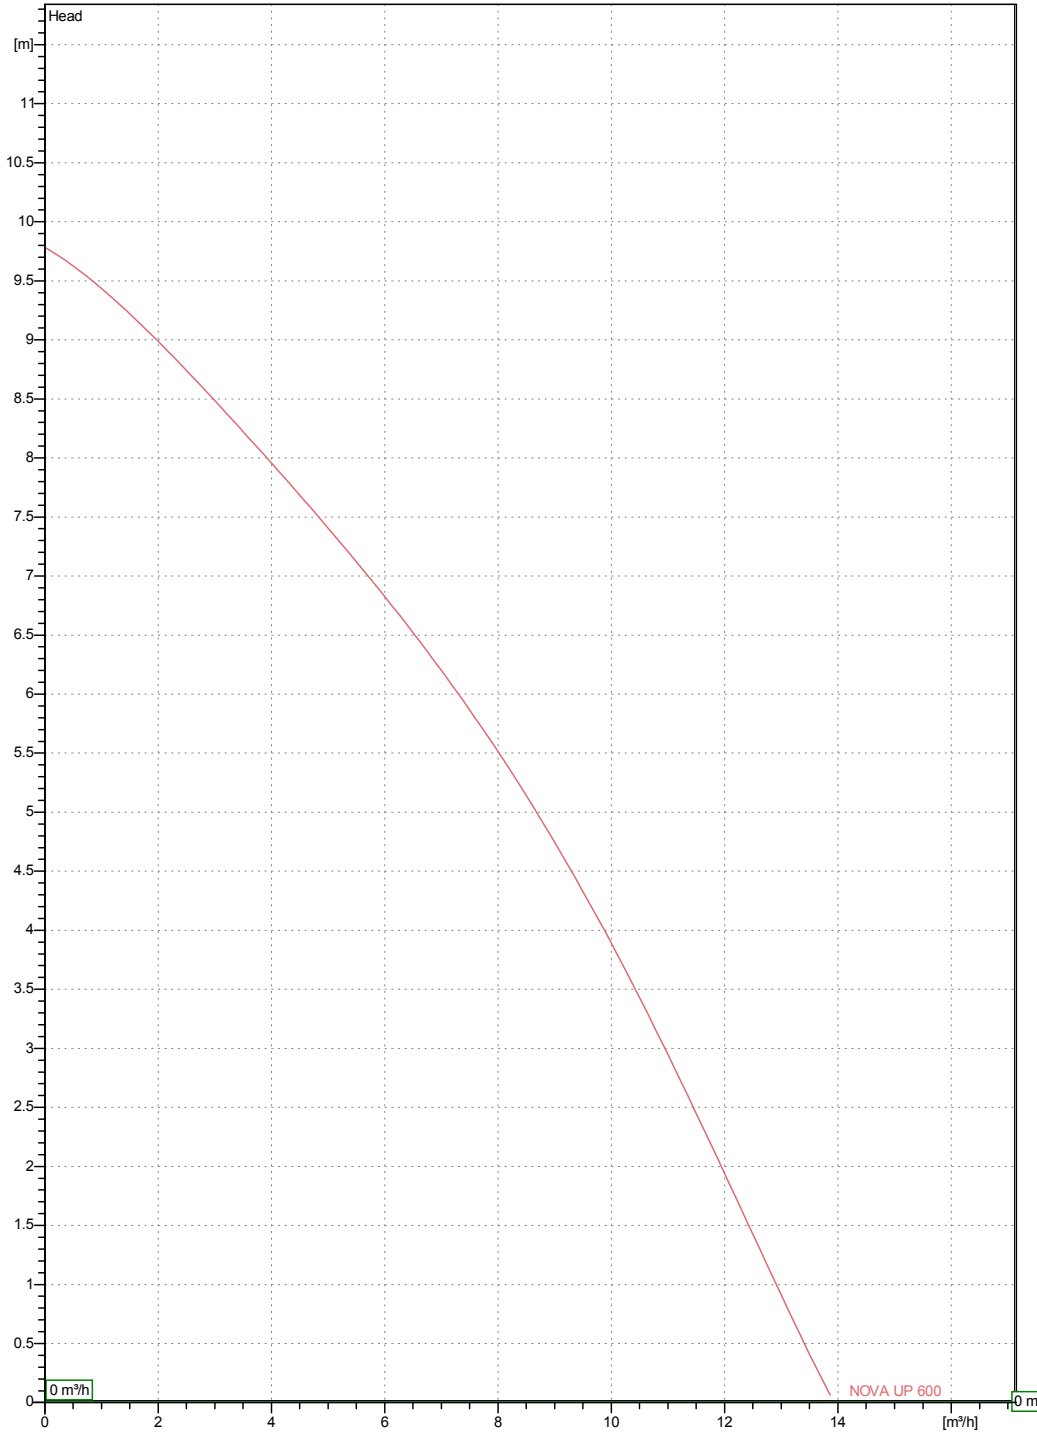

Hydraulic data (duty point)


Suction side :	Discharge side :	Flow :	Head :	Rated speed :
	1 " 1/4 G	0 m³/h	0 m	2850 rpm
	--			
Project	Project ID	Created by	Created on	
			24/03/2016	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVA UP 600 M-AE

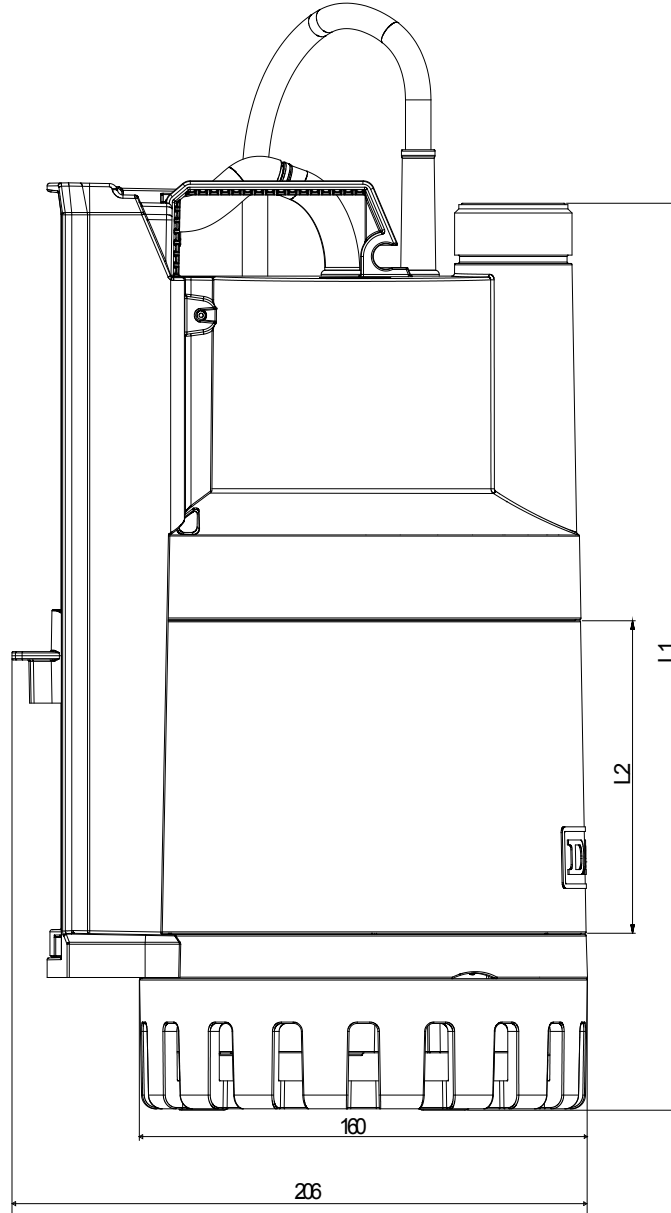

Dimensions in mm

1	L1	324					
2	L2	111.6					

Pump connection

Suction

Discharge
1 " 1/4 G
-

Project

Project ID

Created by

Created on

24/03/2016